

# Chromata Feel

## TECHNICAL SPECIFICATION

Manufacturing method	: Shaggy
Pile type	: Cut pile
Pile fibre	: 100% polyamide 6.6 piece-dyed
Gauge	: 5/16"
Pile weight	: 1200 gr/m <sup>2</sup>
Pile height	: 21.0 mm
Total weight	: 2100 gr/m <sup>2</sup>
Total thickness	: 23.0 mm
Tuft density	: 42.840/m <sup>2</sup>
Roll width	: 400 cm
Backing	: Actionback



## PERFORMANCE

Use classification	: 23 + 33
Caster chair test	EN 985 : B, occasional use
Abrasion	EN 1963 : Pass
Vettermann test	EN 1471 : Pass
Dimensional stability	EN 986 : Pass
Thermal isolation	ISO 8302 : 0.196 m <sup>2</sup> K/W
Sound absorption	ISO 140-8 : 28 dB
Luxery class	: LC4
DOP-nr	: 1016-3612
Prodis-nr	: B6056BA8

## ELECTROSTATIC


Static loading	: Anti-static
Walking test	EN 1815 : ≤ 0.02 KV
Horizontal resistance	ISO 1096 5 : 9.0 x 10. <sup>11</sup> Ohm
Vertical resistance	ISO 1096 5 : 9.9 x 10. <sup>10</sup> Ohm

## FLAMMABILITY

Reaction to fire	EN ISO 9239-1 : Cfl-s1
Reaction to fire	BS 4790 : Low radius of effect of ignition

## COLOUR FASTNESS

Light	ISO 105 B02 : 5.0
Rubbing	ISO 105 x12 : 4.0 - 5.0
Water	ISO 105 E01 : 4.0 - 5.0

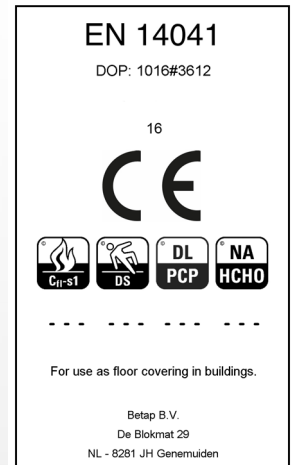

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.